



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.08.2000 Bulletin 2000/31

(51) Int Cl.7: **A61C 13/003**

(21) Application number: **99201342.5**

(22) Date of filing: **28.04.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Lans, Maris J.**
Centreville, Virginia 20120 (US)
• **Purvis, Daniel E.**
Indianapolis, Indiana 46219 (US)

(30) Priority: **26.01.1999 US 236869**

(74) Representative: **Barendregt, Frank, Drs.**
van Exter Polak & Charlouis B.V.,
P.O. Box 3241
2280 GE Rijswijk (NL)

(71) Applicant: **Eastflex Corp.**
Indianapolis, Indiana 46219 (US)

(54) **Improved intracoronally supported pontic**

(57) The pontic support structure for receiving and supporting a pontic is attached intracoronally between a pair of existing teeth and has a matrix upon which the

pontic is formed and two opposed wings for engagement with corresponding slots in the pair of existing teeth.

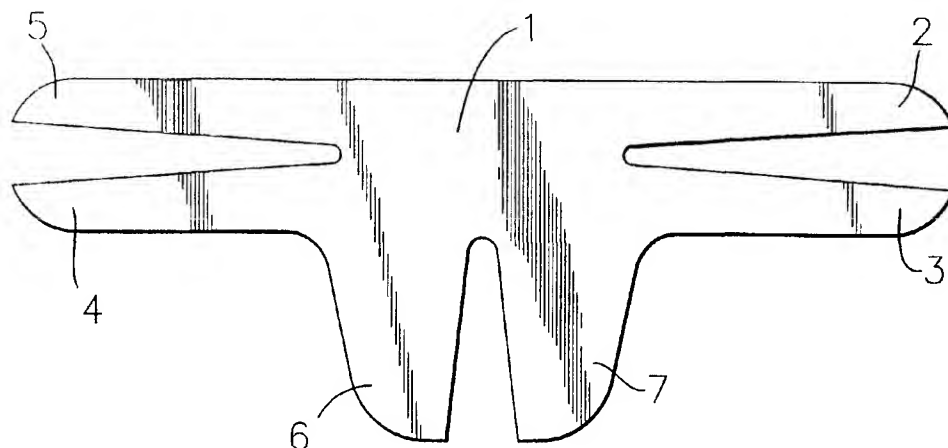


Fig. 1

Description**SUMMARY OF THE INVENTION**

[0001] The present invention is directed to an intracorona-
 5 rona-ly supported dental prosthesis. More particularly,
 the present invention teaches a means for supporting a
 pontic to replace interdental missing teeth between two
 adjacent natural teeth. The invention further involves a
 unique anchoring system for maintaining the support
 10 structure between the two adjacent teeth as well as a
 system for forming the pontic around the support struc-
 ture

BACKGROUND OF THE INVENTION

[0002] Problems which are uniquely associated with
 the prosthetic replacement of missing teeth, as opposed
 to providing an entire bridgework, have long been rec-
 ognized in dental technology. One of the principle diffi-
 20 culties has been in providing a satisfactory support
 structure for the pontic so that it is maintained correctly
 in position between the adjacent teeth. A further prob-
 lem has been providing the pontic itself and attaching it
 to a satisfactory support structure between adjacent
 teeth, particularly in view of the natural movement which
 occurs between opposing and adjacent teeth in the
 chewing process.

[0003] The prior art systems for providing a prosthetic
 replacement between adjacent teeth have involved sup-
 port structures that were either (1) fixed extra corona-
 ly to the back side of adjacent teeth or (2) supported by a
 "Maryland bridge", which fits inside the mouth. Either of
 these prior art practices add bulk dimension to the ad-
 25 jacent teeth or inner gum area. At best it is uncomforta-
 ble and difficult to maintain in hygienic condition. It is
 impossible to use in cases of tight occlusions.

[0004] Accordingly, there is a need to provide a pros-
 thetic device and procedure which can be accomplished
 quickly and easily in a single sitting. There is a further
 need for a simplified device and procedure for fixing a
 pontic intracorona-ly between adjacent teeth so as to not
 30 impinge on the inner surface of the mouth.

[0005] Besides providing a simplified procedure and
 device which can be implemented in a single office visit,
 the present invention accomplishes these objectives
 and additionally provides a prosthesis pontic which does
 not impinge on the inner surface of the mouth and which
 can be altered as needed to accommodate changes in
 tissue contours.

[0006] It is a further object of the present invention to
 provide a prosthesis pontic support structure that can
 extend across a gap of one or more missing teeth, and
 be fixed intracorona-ly between adjacent teeth so as to
 35 not impinge on the inner surface of the mouth.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Figure 1 illustrates the single pontic support
 structure of the invention.

5 [0008] Figure 2 illustrates the adjacent teeth provided
 with slots to accommodate the single pontic support
 structure of the invention.

[0009] Figure 3 is a front plan cut-away view illustrat-
 ing the entire dental prosthesis including the support
 structure and single pontic in place between two adja-
 10 cent teeth in accordance with the invention.

[0010] Figure 4 is a side plan cut away view illustrating
 the single pontic formed on the support structure of the
 invention.

15 [0011] Figure 5 illustrates the flat blank out of which
 the multiple pontic support structure is formed.

[0012] Figure 6 illustrates the multiple pontic support
 structure, the top portion of which has been bent into a
 horizontal position relative to the vertical bottom posi-
 20 tion.

[0013] Figure 7 illustrates the multiple pontic support
 structure, the bottom engaging wings of which have
 been bent into an engaging relationship with the adja-
 cent teeth.

25 [0014] Figure 8 illustrates in front plan view the multi-
 ple pontic support structure in relation to the adjacent
 teeth.

[0015] Figure 9 illustrates in top plan view of the mul-
 30 tiple pontic and the pontic support structure in relation
 with the adjacent teeth.

DETAILED DESCRIPTION OF THE INVENTION

[0016] The present invention is directed to a new in-
 35 tracorona-ly supported prosthetic replacement for inter-
 dental missing teeth. It comprises a flat framework
 which can be stamped out of etched stainless steel. The
 framework has a central matrix portion and retention
 wing portions extending laterally on opposite sides of
 the matrix portion. Each wing portion is comprised of two
 or more parallel wings, which provide flexion relative to
 axis of the wings. The matrix portion includes parallel
 prongs to provide space between the prongs for dis-
 placement of bonding compositions, such as resin.

45 [0017] In applying the new device, slots are drilled into
 the top and side of each tooth adjacent to the missing
 tooth or teeth. These slots correspond to the retention
 wing portions. By using a mold of the patient's dental
 arch, the dentist can form, shape, proportion and tint the
 pontic so that is specifically appropriate to the patient's
 50 specific need. This pontic superstructure is bonded to
 the infrastructure of the central matrix portion. The pros-
 thetic device is then inserted into the intended space,
 the retention wing portions fitting into the corresponding
 slots provided in the adjacent teeth. When in place, the
 wings are bonded, sealed and covered with resin or oth-
 55 er bonding composition, so that the inner and outer (i.e
 lingual proximal and buccal proximal) surfaces of the ad-

adjacent teeth are as they were before installation. The invention makes it possible to install the pontic during a single visit to the dentist; and the design of the invention is meant to receive all current dental restorative materials as the pontic superstructure. The invention can be fitted with silver alloy, hammered gold or hybrid etched precious metal surfaces as well as resins for its pontic superstructure.

[0018] Directing attention to Figure 1 of the drawings, the support structure employed for replacement of a single missing tooth is shown consisting of a matrix portion 1 having two opposing engagement members each of which comprises a pair of parallel wings 2,3,4 and 5 which are adapted to fit within parallel slots drilled in the two teeth adjacent the single missing tooth. The matrix portion 1 is provided with two spaced apart parallel prongs 6 and 7 which are transverse to the opposed parallel wings.

[0019] As illustrated in Figure 2 of the drawings, parallel slots 12, 13, 14 and 15 are drilled in adjacent teeth 8 and 9 to accommodate the respective opposing engagement members comprising parallel wings 2, 3, 4 and 5.

[0020] Figure 3 of the drawings illustrates implantation of the single pontic 10 between two natural teeth 8 and 9. As shown, the opposed parallel wings 2, 3, 4 and 5 are respectively engaged within the parallel slots 12, 13, 14 & 15 provided in the teeth 8 and 9 disposed on either side of the gap formed by the single missing tooth.

[0021] In Figure 4, the matrix portion 1 is seen embedded within the superstructure 10 forming the pontic.

[0022] Directing attention to Figure 5 of the drawing, the multiple pontic support structure is shown as the flat blank, that can be stamped or cut from a sheet of stainless steel or other appropriate material. It includes a matrix portion 21, provided with opposed parallel wings 22, 23, 24 and 25 and prongs 26, 27, 28, and 29 extending transverse to the opposed parallel wings.

[0023] As illustrated in Figure 2, the top portion 30 of the blank is folded into a position horizontal to the vertical bottom portion 31, along fold line 39.

[0024] The flat blank of Figure 1, also illustrates the engaging wings 32 and 33. When the blank is folded, as illustrated in Figure 2 the engaging wings 32 and 33 are vertical extensions of lower portion 31, and at a right angle to the horizontal opposed parallel wings 22, 23, 24 and 25.

[0025] Figure 3 illustrates how the engaging wings 32 and 33, can be bent to engage the adjacent teeth. Specifically, wing 32 is bent to wrap around the inner, lingo proximal surface of one adjacent tooth, while wing 33 is bent to wrap around the outer, buccal proximal surface of the opposite adjacent tooth.

[0026] Figure 4 illustrates the pontic support structure in relation to and engaged with the adjacent teeth 35 and 36. The wings 22 and 23 fit into shallow parallel slots which have been drilled into the top surface adjacent

tooth 36; wings 24 and 25 fit into shallow parallel slots which have been drilled into the top surface of adjacent tooth 35.

[0027] The pontic support structure of the present invention is used to span the gap of two or more missing teeth.

[0028] The embodiment of the invention illustrated in Figures 1-4 comprises a pontic support structure used to span the gap of a single missing tooth. It is a simplified form of the invention since a relatively narrow gap is involved and there is less space between the adjacent supporting teeth. There is less rigidity required of the matrix and less points of flexion required of the wings which anchor it to the adjacent supporting teeth.

[0029] The embodiment of the invention illustrated in Figures 5-9 comprises a pontic support structure used to span the gap of multiple missing teeth.

[0030] This requires more points of flexible anchoring to the adjacent teeth than is required for a pontic filling the gap of a single missing tooth because a longer span must be supported. Therefore, in addition to the horizontal parallel wings 22, 23, 24 and 25, the pontic support structure of the present invention has the vertical parallel wings 32 and 33. Wing 32 fits into a shallow slot drilled into the lingo proximal surface of adjacent tooth 35. Wing 33 fits into a shallow slot drilled into the facial proximal surface of adjacent tooth 36. After appropriate pontic superstructures 37 and 38 have been formed on the matrix infrastructure 21, the various wings 22, 23, 24, 25, 32 and 33 are fitted into their corresponding slots on adjacent teeth 35 and 36, bonded, sealed and covered with resin or other bonding compositions. So when the pontic support structure has been installed, all top and side surfaces of the adjacent teeth will be substantially as they were before the installation.

[0031] It is axiomatic that any linear material folded to assume an "L" shaped cross section achieves an exponentially greater rigidity. Therefore, it will be understood that when the pontic support structure is installed, as above described, it provides great rigidity across its matrix portion 21 as a result of being folded along fold line 39 to assume an "L" shaped cross section. But the wings 22, 23, 24, 25, 32 and 33 are not folded and therefore provide the required degree of flexion between the pontic support structure and the adjacent teeth to which it is anchored.

[0032] It will be further understood that wings 22 and 23, are at opposite corners of the pontic support structure, or contralateral to each other. This contralateral positioning of wings 22 and 23 add to the stability provided by the horizontal parallel wings 22, 23, 24 and 25. But additionally, the vertical wings 32 and 33 permit a controlled vertical flexion of the pontic support structure.

[0033] It is an important aspect and advantage of the present invention, that it provides a central pontic support matrix 21, having a very rigid "L" shaped cross section where rigidity is required and yet it is anchored to the adjacent teeth by the relatively two dimensional

wings 22, 23, 24 and 25, 32 and 33, which permit the desirable degree of flexion relative to the adjacent teeth, 35 and 36.

[0034] The intracoronally supported dental prosthesis of the present invention provides several advantages in addition to those described above, particularly with respect to pediatric and geriatric dentistry. In pediatric dentistry there is often a need for space management in the primary and secondary dentition. The present invention without modification can be used to fabricate fixed spaced maintenance appliances. Due to the refractive sizing, the invention can also be used in the fabrication of space regaining appliances. The advantage of the present invention over existing prior art in pediatric applications is that in the majority of prior art appliances the missing tooth space is first filled by a removable acrylic appliance which can be easily lost and which requires that the adjacent teeth be stripped to accommodate bands which are often necessary to retain the appliance. Because there is no visible metallic component in the present invention, aesthetics are far more acceptable to children as well as parents. Further, the present invention requires only that the support structure be suspended between the adjacent teeth and therefore does not bear down on the gingival tissue. Prior art devices in which pressure is exerted against gingival tissues can be uncomfortable for the patient in cases where an expected tooth is erupting beneath. Further, the cost of replacing a lost or removable retainer can increase the overall cost of orthodontic treatment. In children with handicaps from gross physical motor deficiencies to mild speech impediments, the fixed nature of the present invention is an obvious improvement over any removable appliance. Because the pontic can be easily modified and/or repaired, changes in gingival contour can be accommodated without extensive procedures. Identification chips can be placed inside the prosthesis of the invention to aid in the identification of lost children or for forensic investigations.

[0035] With regard to geriatric applications, conventional crowns and bridges usually require several appointments with the dentist, multiple local anesthetic injections and reduction of the enamel surface of the teeth and disruption of the peri-coronal gingival attachment. The stresses of these procedures are often contraindicated for the geriatric or medically compromised population. A shorter procedural time with the dentist lowers the cost of the procedure. The present invention can also be utilized as a periodontal splinting appliance to help stabilize the supporting teeth without excessive torque that would be unavoidable with a removable or conventionally fixed pontic and can be used in conjunction with the periodontal splint.

[0036] Because of the atrophy of the pulp chamber and formation of secondary dentin in older patients, the need for local anesthesia is often unnecessary in accordance with the procedure of the present invention as it requires only very conservative preparations. Fluoride

releasing composites can be utilized to minimize the reduction of carries. This is an option that is not available with conventional procedures and appliances. Children can also benefit from the fluoride releasing composites.

The procedure allows for the improvement of the contact point between the pontic and the adjacent supporting teeth by the ability to bond to the supporting teeth in a dynamic manner. This is achieved by bonding the teeth during occlusal loading. Conventional bridges are cast or fabricated for a passive fit. Supporting teeth cannot move during the prior art occlusal loading regardless of how heavy the cementation force is. The attachment system of the invention allows the pontic and support structure to move in relation to the occlusal load because the resin is not completely set until it is cured. The procedure for bonding the support structure allows the dentist to fine tune the position of the pontic during the actual placement, which is something that conventional bridgework does not allow. Unique to the present invention is the occlusal loading during bonding, placing the root surface of the supporting tooth on the pontic side in tension. Tension promotes osteoblastic activity which in turn promotes bone growth as opposed to conventional bridges which reduce the amount of bone because of gingival destruction. The present invention is therefore a constructive procedure because it improves interproximal contact, and promotes bone growth during its service in the patient's mouth, whereas the conventional bridge is destructive to the contacts and supporting bone, and gingival margins.

[0037] Further because of the osteoblastic activity associated with the present invention, an implant placed underneath it will be more rapidly and completely osteointegrated thereby reducing the healing time significantly. Because the present invention is suspended over the implant site, there is no unfavorable pressure being directly exerted upon the pontic and the freshly healing gingival tissues, thereby greatly adding to patient comfort and the improved healing of the site of the surgery.

[0038] It should be noted that in performing the process of this invention, the pontic can be formed in situ around the support structure that is already intracoronally affixed to the adjacent teeth, or alternatively the pontic can be formed out of the mouth around the support structure, and the entire prosthetic device then installed between two adjacent teeth as described above. In the latter process, which is the one preferred in most circumstances, a mold is made of the dental arch including the gap formed by the missing tooth. Working with the mold, a pontic which is perfectly calculated for the gap can be formed in the laboratory using the latest and best techniques and materials with the support structure imbedded therein. When it is completed, it is then installed in the patient's mouth which does not take much of the patient's or dentist's time. The process requires two visits to the dentist (i.e. (1) to cast the mold (2) to install the prosthetic device). However, in some circumstances where it may be necessary to have an immedi-

ate replacement of a missing tooth, the pontic can be formed in situ on the installed support structure all in one sitting. It will of course be appreciated that the cast pontic can then be finally configured by typical grinding techniques both to facilitate its bite and interaction with other teeth and its appearance.

[0039] Other modifications and alternatives to the herein described procedures and components will be apparent to those of ordinary skill in this art and are considered to fall within the scope of the claims defining this invention.

Claims

1 A dental prosthesis support structure for receiving and supporting a pontic and attaching it intracoronally between a pair of existing teeth, said support structure comprising a matrix for supporting said pontic and two opposed wings each extending laterally on either side of said matrix for engagement within corresponding slots formed in the said pair of existing teeth, said support structure being a flat framework of stainless steel.

2. The dental structure of claim 1 wherein each of said opposed wings comprises a pair of parallel prongs which extend away from said pontic to engage within said slots.

3. The dental structure of claim 1 wherein said matrix is provided with an extension for anchoring it within said pontic.

4. The dental structure of claim 3 wherein said extension comprises two parallel prongs aligned transverse to said opposed wings.

5 A method for attaching and supporting a pontic intracoronally in a gap between a pair of existing teeth which comprises:

forming an impression of the dental arch within said gap and forming slots in said existing teeth adjacent said gap to receive respective engagement extensions of a support structure for said pontic;

forming said pontic in said impression around a matrix having attached thereto on either side said engagement extensions to form said pontic support structure wherein each of said engagement extensions comprises a pair of spaced parallel prongs and said matrix comprises a pair of parallel prongs aligned transverse to said engagement extensions;

engaging and adhering said engagement ex-

tensions within said slots to thereby anchor said pontic intracoronally between said pair of existing teeth.

6. A method for attaching and supporting a pontic intracoronally in a gap between a pair of existing teeth which comprises:

anchoring a support structure for said pontic between said pair of existing teeth by forming slots in said existing teeth adjacent said gap to receive respective engagement wings on a matrix forming said support structure and engaging and adhering said engagement wings within said slots to thereby anchor said support structure intracoronally between said pair of existing teeth, wherein each of said engagement wings comprise a pair of spaced parallel wings and said matrix comprises a pair of parallel prongs aligned transverse to said engagement extensions;

forming the pontic in situ from dental material between said existing teeth and around said matrix so that it is disposed and anchored in said gap.

7. A dental prosthesis support structure for receiving and supporting a pontic and attaching it intracoronally between a pair of existing teeth, said support structure comprising a matrix folded to form a horizontal top portion and a vertical bottom portion, opposed wings extending laterally on either side of said horizontal top portion for engagement within corresponding slots formed in the said pair of existing teeth, opposed wings extending laterally on either side of the said vertical bottom portion for engagement within corresponding slots formed in the said existing teeth.

8. The dental prosthesis support structure of claim 7, wherein the opposed wing extending laterally from one side of the vertical bottom portion is bent to engage a slot formed in the inner side of the adjacent tooth, and the opposed wing extending laterally from the opposite side of the vertical bottom portion is bent to engage a slot formed in the outer side of the adjacent tooth..

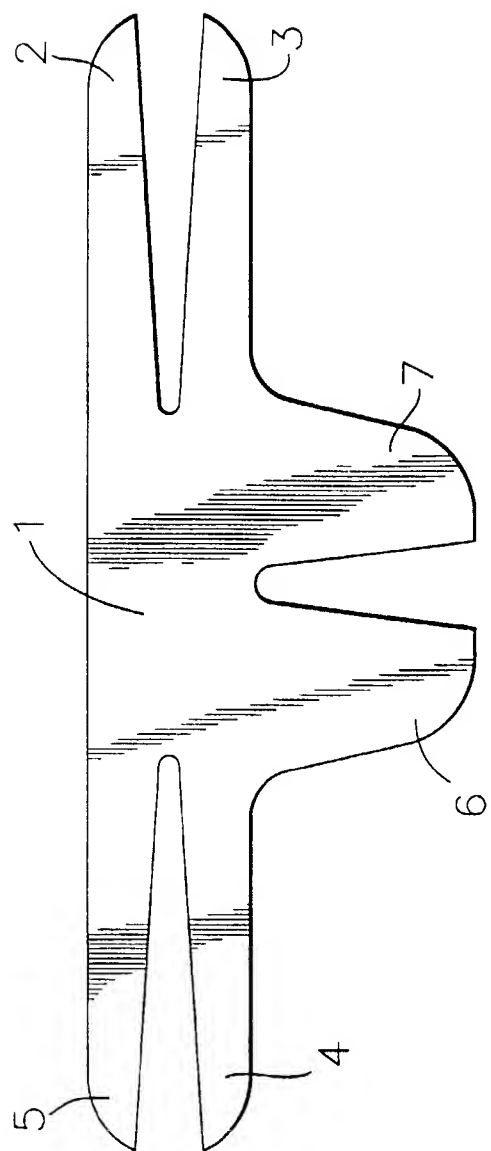


Fig. 1

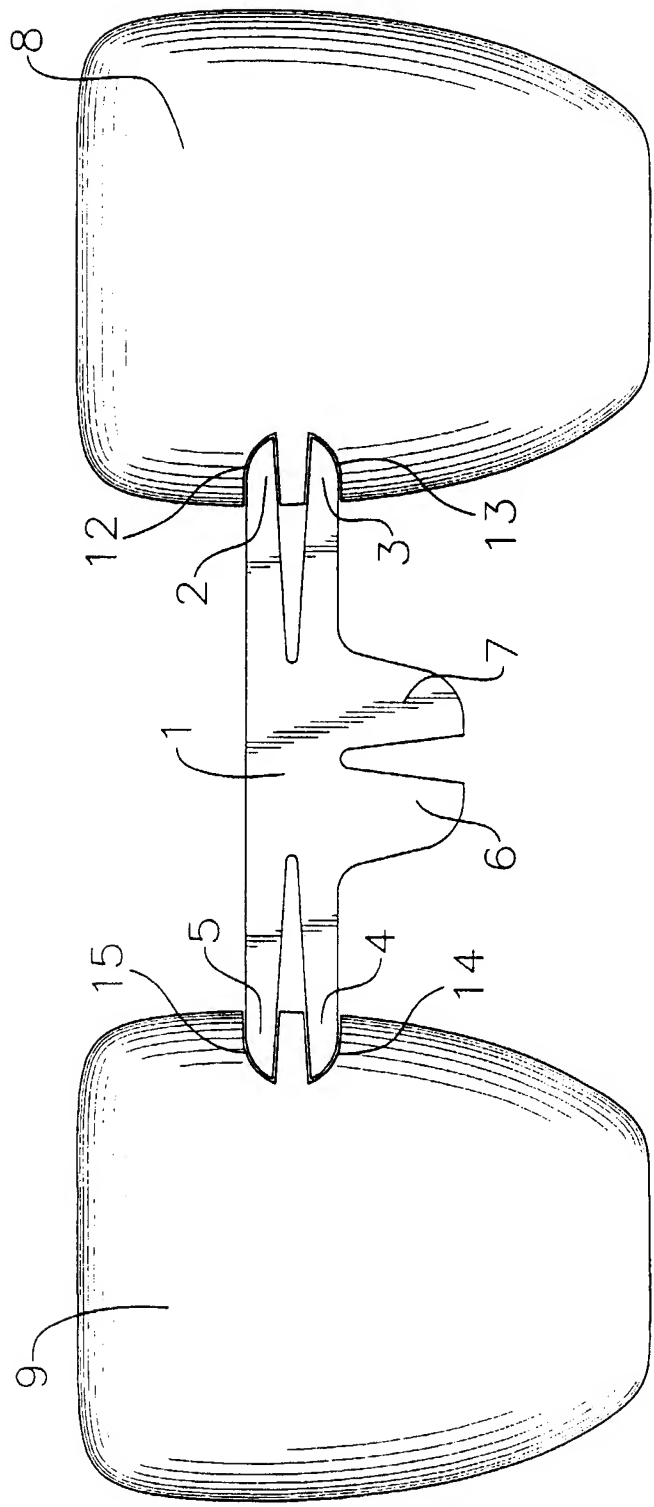


Fig. 2

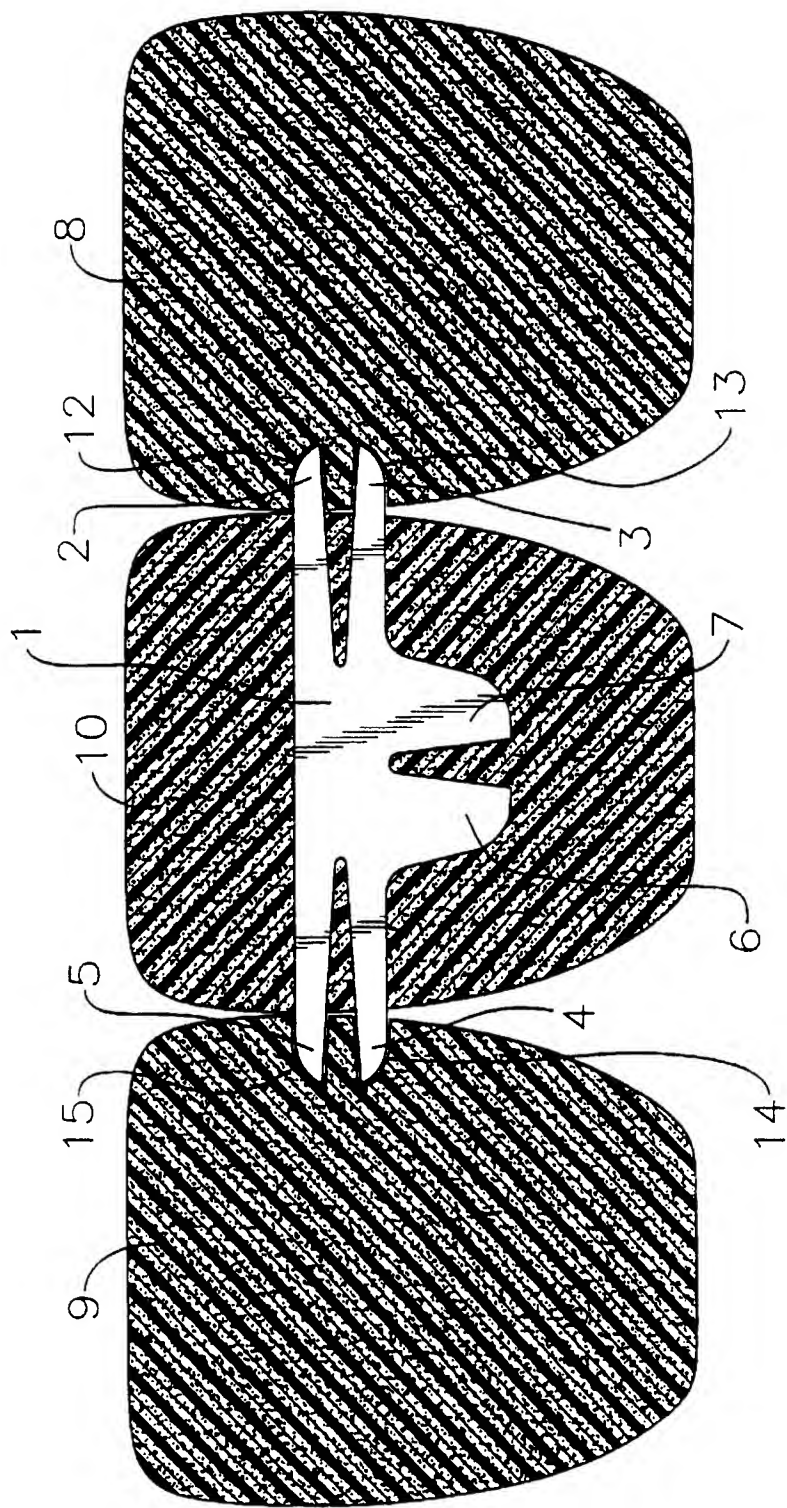


Fig. 3

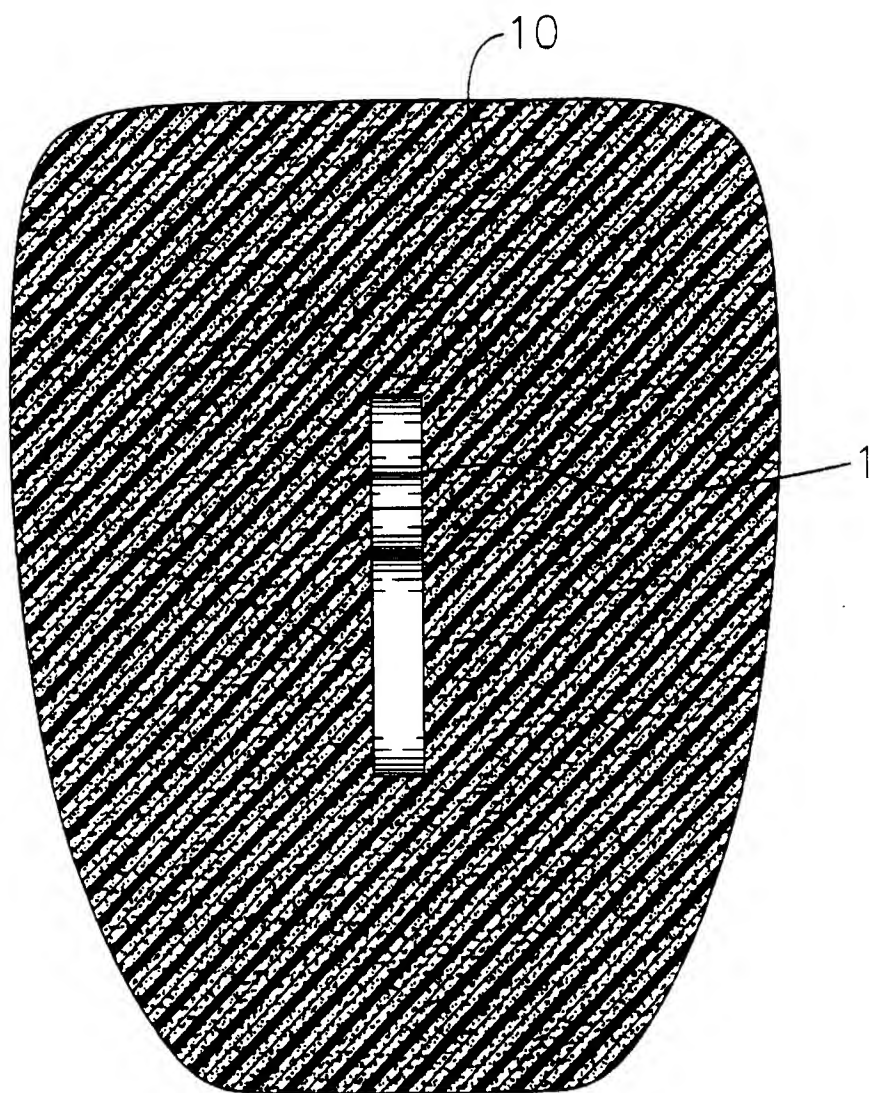


Fig. 4

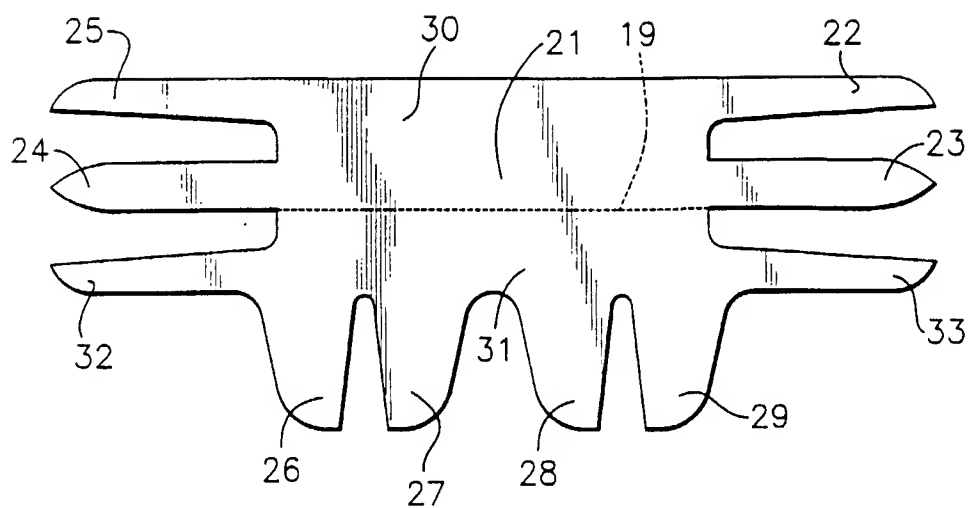


Fig. 5

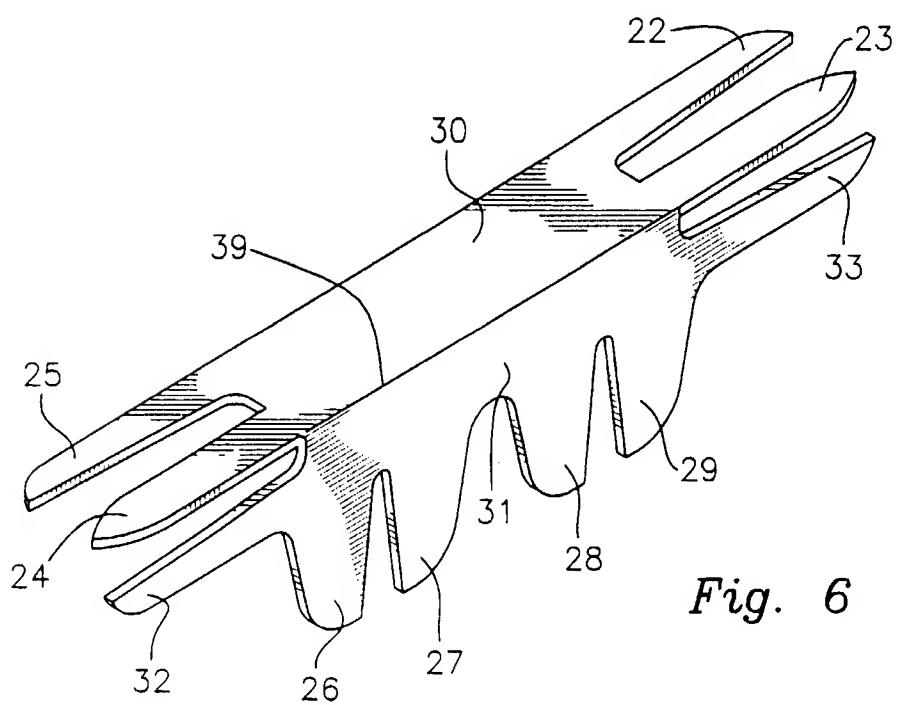
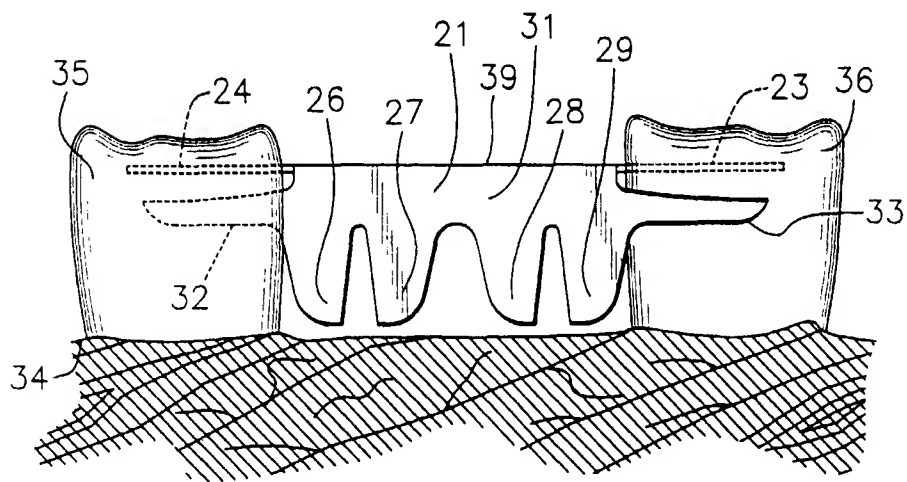
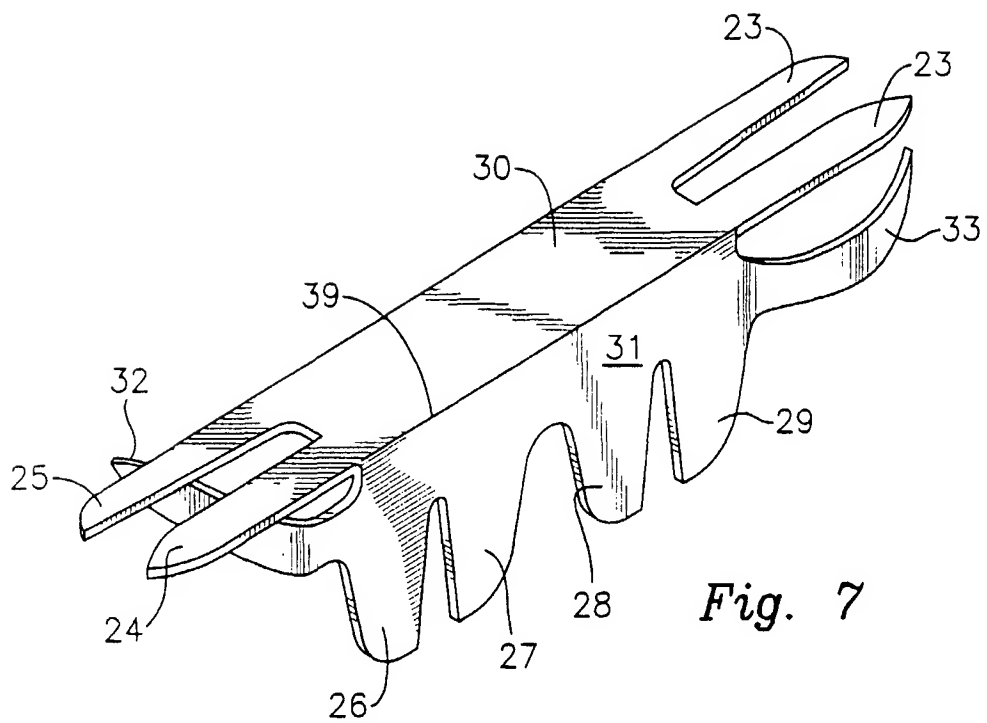


Fig. 6



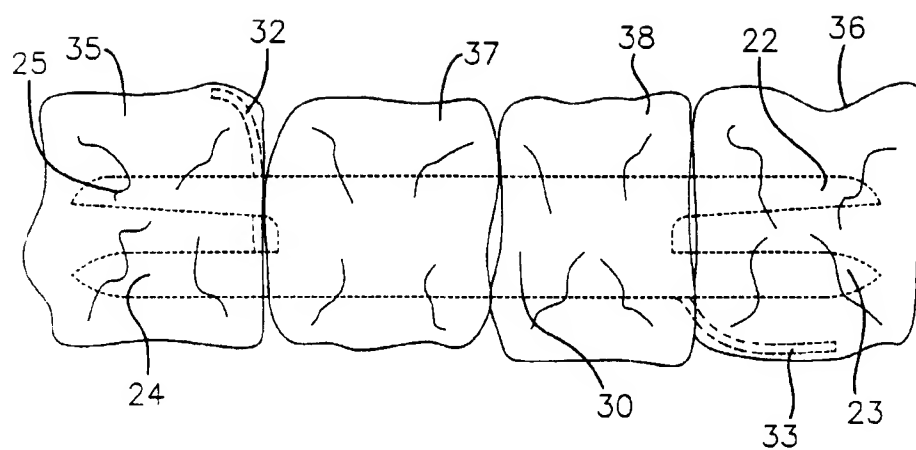


Fig. 9